


DOM Nodes, Prototypes, and Prototypal Chain in Javascript

v2

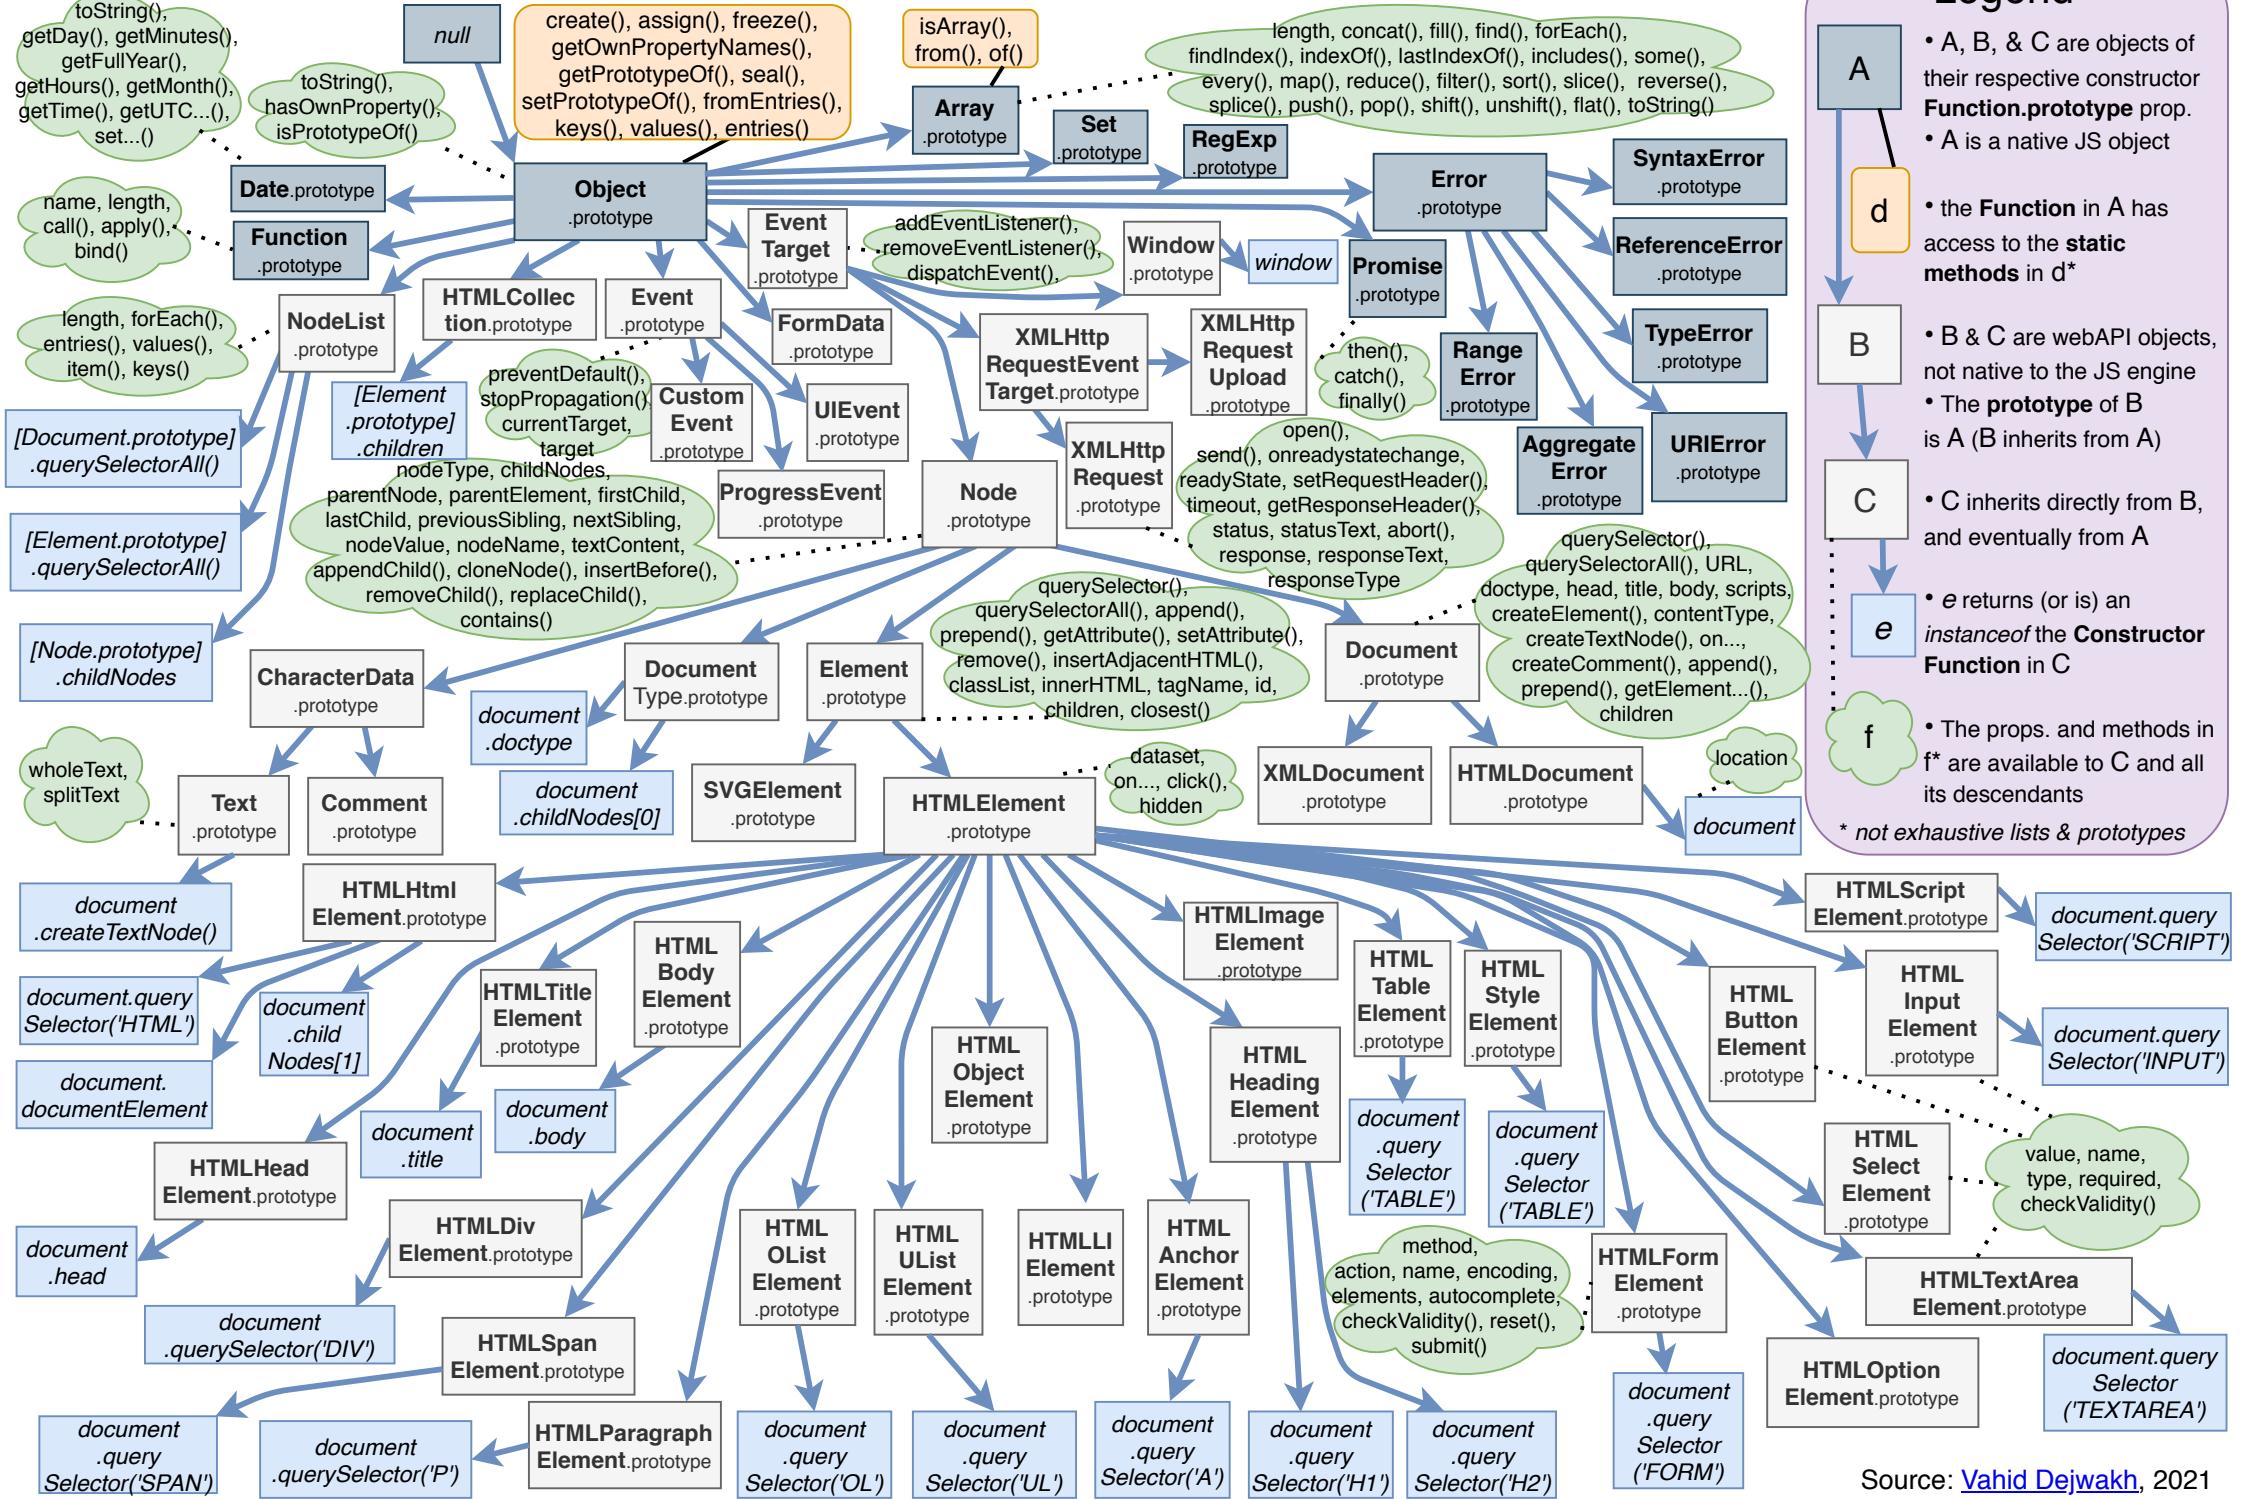

Legend*

- A, B, & C are objects of their respective constructor **Function.prototype** prop.
 - A is a native JS object

• the **Function** in A has access to the **static methods** in d*

• B & C are webAPI objects, not native to the JS engine

• The **prototype** of B is A (B inherits from A)

• C inherits directly from B, and eventually from A

• e returns (or is) an *instance* of the **Constructor Function** in C

• The props. and methods in f* are available to C and all its descendants

exhaustive lists & prototypes

Source: Vahid Dejwakh, 2021